

# DIESEL GENERATOR SET 190V-440V 3P4W

## ISO 9001:2000 – – Standard Features and Characteristics

### Rating Range

		<b>1500RPM</b>	<b>50Hz</b>
<b>Standby:</b>	kW	440	
	kVA	550	
<b>Prime:</b>	kW	400	
	kVA	500	



### GENERATOR SET RATINGS

Alternator Model	HCI544D(STAMFORD)	LSA47.2 M8(LEROY SOMER)
Frequency and Speed	50Hz 1500rpm	50Hz 1500rpm

#### Prime Power Data

Class-TEMP Rise(°C)	Cont.H -125K/40°C				Cont.H -125K/40°C		
	380	400	415	440	380	400	415
Voltage series star	380	400	415	440	380	400	415
Voltage parallel star	190	200	208	220	190	200	208
Voltage series delta	220	230	240	254	220	230	240
Rating capacity(kVA)	500	550	500	500	550	550	550
Rating power(kW)	400	440	400	400	440	440	440
Power efficiency(%)	94.5	94.3	94.8	94.9	94.4	94.4	94.4
Input power(kW)	423	467	422	421	464	464	464

#### Standby Power Data

Class-TEMP Rise(°C)	Standby.H -125K/40°C				Standby.H -125K/40°C		
	380	400	415	440	380	400	415
Voltage series star	380	400	415	440	380	400	415
Voltage parallel star	190	200	208	220	190	200	208
Voltage series delta	220	230	240	254	220	230	240
Rating capacity(kVA)	515	575	515	515	575	575	575
Rating power(kW)	412	460	412	412	460	460	460
Power efficiency(%)	94.4	94.1	94.7	94.9	94.1	94.1	94.1
Input power(kW)	436	489	435	434	489	489	489

### ● QUALITY STANDARDS

- The OTC generator set compliance with all main standards, such as ISO8528 (GB/T2820-97), GB755, BS5000, VDE0530, ISO3046, IEC34-1, CSA22-2, AS1359, ISO14001.
- Diesel engine and alternator OEM authorization certificate and their quality assurance.
- Other standards and certifications can be considered on request.

### ● ASSEMBLY

- The engine and alternator are close coupled by means of an SAE flange . A full torsional analysis has been carried out to guarantee no harmful vibration will occur.
- Anti-vibration pads are affixed between engine alternator feet and the baseframe. Thus ensuring complete vibration isolation of the rotating assemblies and enabling the machine to be placed on an uneven surface without any detrimental effects.
- For durability and corrosion resistance, all iron and steel surfaces of canopy fabrications have been treated for coating by grit blast cleaning. Then covered by a polyester powder paint which provides an excellent corrosion resistant surface.

### ● CONTROL SYSTEM AND PROTECTION

- Controllers are available for all applications. The controller system is used to start and stop the engine , indicate electric date and protect the generator set. See controller features inside.
- The revolving parts are covered by safety net , and the place which easy to scald and got an electric shock all to have the obvious warning slogan

### ● WARRANTY

- OTC Company provides one source responsibility for the generator set and accessories.
- Each OTC generating set has been got through 2 hours load test for running 0%,25%,50%,75%,100% and 110% load, all protective devices and control function are stimulated and checked before dispatch.
- All equipment is guaranteed for the period of 1000 hours or 12 mouths from the date of commissioning or 18 months from shipping, whichever occurs first.
- Convenience for operation and maintenance, backed by PERKINS ,NEWAGE(CUMMINS) and LEROY SOMER global service network.

**RATINGS:** All three-phase units are rated at 0.8 power factor. **Standby ratings :** Standby ratings apply to installations served by a reliable utility source. The standby rating is for this rating. Ratings are in accordance with ISO-3046/1, BS 5514, AS 2789 , and DIN 6271. **Prime Power Ratings:** Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528/1, overload capacity in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. For limited running time and base load ratings, consult the factory. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. **GENERAL GUIDELINES FOR DERATION: Altitude:** Derate 2.0% per 300m(984 ft.) elevation above 1000m(3279ft.) up to a maximum elevation of 2450m(8000 ft.). More than 2450m(8000ft), please contacts with us or our dealer seek the help. **Temperature:** Derate 6.0% per 11 °C (20°F) temperature above 40°C (104°F).

# ALTERNATOR

Specification	1500RPM 50Hz
Type	4-Pole, Rotating Field
Exciter type	Brushless, Self excited
Voltage regulator	Solid State, Volts/Hz
Voltage regulation	≤1.5%
Insulation	Class H
Protection	IP23
Rated power factor	0.8
Stator winding	Double layer concentric
Winding pitch	Two thirds
Winding leads	12
Maximum overspeed	2250 Rev/min
Sustained short circuit	Self excited machines do not sustain a short circuit current
Waveform distortion	No load < 1.5% Non-distorting balanced linear load < 5.0%
Altitude	≤1000 m

- Alternators meet the requirement of BS EN60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSAC22.2-100, As1359, and other standards and certifications can be considered on request.
- The 2/3 pitch design avoids excessive neutral currents. With the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.
- Brushless alternator with brushless pilot exciter for excellent load response.
- The insulation system is class H, easy paralleling with mains or other generators, standard 2/3 pitch stator windings avoid excessive neutral currents.
- Backed by worldwide service network

# DIESEL ENGINE

- 2506C-E15TAG2 diesel engines are manufactured by Perkins Engines Company Limited(UK).
- It is a compact 4-cylinder naturally aspirated diesel engine. Its premium features provide economic and durable operation for standby duty, low gaseous emissions, overall performance and reliability. Its rating speed is 1500rpm.

## Application Data

Engine Specifications	1500RPM 50Hz
Manufacturer	PERKINS(UK)
Number of cylinders	6
Cylinder arrangement	Vertical in-line
Cycle	4 stroke, compression ignition
Induction system	Turbocharged and air-to-air charge cooled
Compression ratio	16:1
Bore	137 mm (5.39in)
Stroke	171mm (6.73 in)
Cubic capacity	15.2litres(927In <sup>3</sup> )
Direction of rotation	Anti-clockwise viewed on flywheel
Firing order	1, 5, 3, 6, 2, 4
Max.Power at rated rpm	451KW(605BHP)
Estimated total weight(dry)	1633kg (3600 lb)
Frequency regulation steady state	±0.25%
Frequency	Fixed
Mean piston speed	8.0 m/s
Combustion air flow	37 m <sup>3</sup> /min

## Exhaust

Exhaust System	1500RPM 50Hz
Maximum back pressure	6.8 kPa
Exhaust outlet size	150mm
Exhaust gas flow (max)	98 m <sup>3</sup> /min
Exhaust gas temperature (max)	550°C(1022°F)

## Lubrication

Lubrication system	1500RPM 50Hz
Total system	62litres
Sump minimum	45litres
Relief valve opens	610kPa
Normal oil temperature	95°C (203°F)

## Engine Electrical

Engine Electrical System	1500RPM 50Hz
Battery charging alternator:	
Ground(negative/positive)	Negative
Volts(DC)	24V
Ampere rating	70A
Starter motor rated voltage(DC)	24V
Starter motor rated Capability	7.5KW
Minimum cranking speed	100 rev/min
Battery voltage	12V

## Fuel

Fuel System	1500RPM 50Hz
Type of injection System	MEUI
Fuel injector	MEUI
Fuel injector pressure	200MPa

Fuel lift pump	1500RPM 50Hz
Fuel lift pump type	Gear driven
Delivery	413litres/hr
Fuel delivery pump delivery pressure	600kPa
Fuel delivery pump maximum suction head	4m
Governor type	Electronic governor

Fuel consumption	1500RPM 50Hz
Standby power	114litre/hr
Prime Power + 10%	114litre/hr
Prime Power	106litre/hr
Baseload Power + 10%	TBAlitre/hr
Baseload Power	TBAlitre/hr
At 75% of Prime Power	81litre/hr
At 50% of Prime Power	55litre/hr

## Application Data

### Cooling System

Radiator	1500RPM 50Hz
Face area	1.283m <sup>2</sup>
Rows and materials	2 rows, Aluminium
Fins per inch and material	12 fins per inch, Aluminium
Width of matrix	1048 mm
Height of matrix	1100mm
Pressure cap setting	69kPa
Fan	50Hz
Diameter	927 mm
Drive ratio	0.92 : 1
Number of blades	9
Material	Plastic
Type	Pusher
Coolant	50Hz
Total system capacity with radiator	58 litres
without radiator	12.8 litres
Drain down capacity	TBA litres
Maximum top tank temperature	107 °C
Maximum permissible restriction to coolant pump flow	30kPa
Thermostat operation range	88 - 98°C (190.4 - 208.4°F)
Recommended coolant:	50% ethylene glycol with a corrosion inhibitor (BS 6580 : 1992 or ASTM D3306-89 or AS2108) and 50% clean fresh water.

## CONTROLLERS

### DSE 702 MANUAL CONTROLLER



The Model 702 is a Manual Engine Control Module designed to control the engine via a key switch and pushbuttons on the front panel. The module is used to start and stop the engine and indicate fault conditions, automatically shutting down the engine and indicating the engine failure by LED, giving true, first up fault annunciation.

#### Panel introduction:

- Indicator type frequency, voltmeter and ampere meter demonstration unit's electrical parameter.
- The voltage change-over switch and the rheotrope uses for to choose the different phase voltage and current to display.
- The big red button uses for the operator to stop the genset peremptorily
- The oil pressure gauge, coolant temperature gauge and the battery voltage gauge.
- The controller. And an integral anti-tamper LCD hours run counter is also provided.
- If the customer needs to use the preheating function, we will be able to increase the preheating button.

#### Protection:

Low Oil Pressure  
High Engine Temperature  
Auxiliary Shutdown  
Over speed

**DC Supply:** 8 to 35 V Continuous.

### DSE 704 AMF CONTROLLER



The DSE704 is an Automatic Mains Failure module with generator monitoring, protection and start facilities. It utilises advanced surface mount construction techniques to provide a compact yet highly specified module. This model can start the unit automatically when the MAINS failure and than control the ATS turn to the genset side. Operation of the module is via three pushbuttons mounted on the front panel with STOP, MANUAL and AUTO positions.

#### Panel introduction:

- Indicator type frequency, voltmeter and ampere meter demonstration unit's electrical parameter.
- The voltage change-over switch and the rheotrope uses for to choose the different phase voltage and current to display.
- The oil pressure gauge, coolant temperature gauge and the battery voltage gauge.
- The controller.
- Preheating button.

#### Protection:

Over Speed Shutdown.  
Low Oil Pressure Shutdown.  
High Engine Temp Shutdown.  
Charger failure alarm.  
Mains failure alarm.  
Optional Under speed Protection.

**DC Supply:** 8 to 35V Continuous.

### PCRC210/220 INTELLIGENT CONTROL SYSTEM



The AMF25 is an Automatic Mains Failure module with generator monitoring, protection and start facilities. The controller has a large LCD screen, display the generator's each parameter, running and alarm information. The off/replacement button, mode switch button, start/stop button and the LED indicator light, makes the user easy to operate and maintain the generator.

#### Panel introduction:

- Indicator or digital type frequency, voltmeter and ampere meter demonstration unit's electrical parameter.
- The big red button uses for the operator to stop the genset peremptorily
- The controller.

#### Function:

- Communication: RS232 connection, uses the industry rank MODBUS protocol can easily communicate with others intelligence control system.
- Display function: LCD screen can display the generator's parameter and the control system's running information.
- Set up parameter: Engineer can setup the controller parameter from the control panel or through the PC, 6 programmable fan-out may satisfy the user each kind of demand.
- Protection: The control system can protect the generator set, manage each kind of electrical failure.
- Control Function of ATS.

**DC Supply:** 8 to 35 V Continuous.

# Standard Features and Accessories

## Standard Features

- Battery, Battery Rack and Battery Cables
- Integral Vibration Isolation
- Oil Drain Extension
- Air cleaner ,Heavy Duty
- 3 Pole Circuit Breaker
- Heavy duty industrial type exhaust silencer with flexible pipe(supplied loose).

## Maintenance and Literature

- General Maintenance Literature Kit
- Test Certificate and design paper
- Quality certificate and Maintenance card

## Accessories

### Enclosed Unit

- Sound Enclosure
- Weather Enclosure (with enclosed critical silencer)
- Weather Housing (with roof-mounted critical silencer)
- Trailer(Causes the genset easily to move)

### Open Unit

- Exhaust Silencer, Critical kit
- Flexible Exhaust Connector, Stainless Steel

### Cooling System

- Block Heater (recommended for ambient temperatures below 0°C)
- Radiator Duct Flange
- Remote Radiator Cooling

### Fuel System

- Auxiliary Fuel Pump
- Flexible Fuel Lines
- Mechanical dipstick or fuel level sensor
- Subbase Fuel Tank with Day Tank
- Fuel fill cap with breather
- 10 hours running tank
- Automatic fuel--providing device
- Hand primer pump

### Electrical System

- Battery Charger, Equalize/Float Type

### Engine and Alternator

- 3 or 4 Pole Circuit Breaker with Shunt Trip
- Fuel/Water Separator
- Oil Preheater
- Air Preheater
- Alternator Strip Heater

## Maintenance and Literature

- Maintenance Kit (includes air, oil, and fuel filters)
- Overhaul Literature Kit

## Paralleling System

- Reactive Droop Compensator
- Voltage Adjust Control
- Voltage Regulator Relocation Kit

## Controller System

- Common Failure Relay Kit
- Customer Connection Kit(Except Open Style)
- Communications Products and PC Software
- Engine Pre-alarm Sender Kit
- Remote Annunciator Panel
- Remote Audiovisual Alarm Panel
- Remote Emergency Stop Kit
- PCRC series control system, with RS232 or RS485 communication connection and communication agreement.


## Miscellaneous Accessories

- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

## Dimensions and Weights


### Open Style

Overall Size, L×W×H, mm	3780×1150×2050
Weight(radiator model),net,Kg	3550

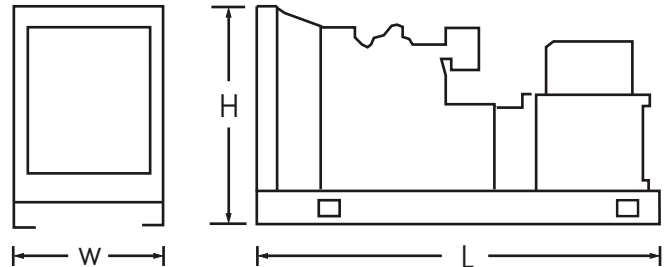

### Soundproof Style

Overall Size, L×W×H, mm	4500×1350×2200
Weight(radiator model),net,Kg	4150

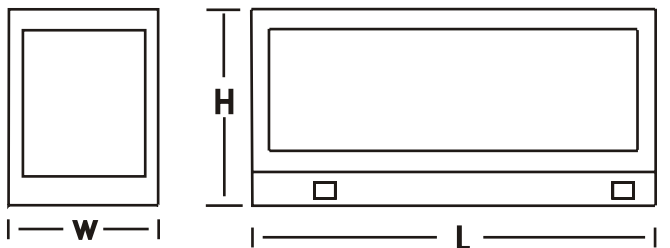

### NOTE:

THIS DRAWING IS PROVIDING FOR REFERENCE ONLY AND SHOULD NOT BE USED FOR PLANNING INSTALLATION OTC RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.

### OVERSEAS TRADING CENTER

P.O.BOX 8266 SHARJAH (A4-075)  
 SAIF ZONE UE.A.E  
 Tel: +971 6 5575888 Website: [www.otcglobal.net](http://www.otcglobal.net)  
 Fax: +971 6 5575999 [www.otcgenerators.net](http://www.otcgenerators.net)