

## ◎ POWER RATING

Engine Speed rev/min	Type of Operation	Engine Power	
		kWm	Ps
1800	Continuous Power	*	*
	Prime Power	307	418
	Standby Power	342	465
1500	Continuous Power	*	*
	Prime Power	265	360
	Standby Power	294	400



Note : -. The engine performance corresponds to ISO 3046, BS 5514 and DIN 6271.

-. Ratings are based on ISO 8528.

→ **Prime power** available at variable load. The permissible average power out put (during 24h period) shall not exceed 70% of the prime power rating.

→ **Standby power** available in the event of a main power network failure. No overload is permitted.

## ◎ MECHANICAL SYSTEM

○ Engine Model	P126TI- II
○ Engine Type	In-line 4 cycle, water cooled Turbo charged & intercooled (air to air)
○ Combustion type	Direct injection
○ Cylinder Type	Replaceable dry liner
○ Number of cylinders	6
○ Bore x stroke	123(4.84) x 155(6.1) mm(in.)
○ Displacement	11.051(674.5) lit.(in <sup>3</sup> )
○ Compression ratio	17 : 1
○ Firing order	1-5-3-6-2-4
○ Injection timing	16° BTDC
○ Compression pressure	Above 28 kg/cm <sup>2</sup> (398 psi) at 200rpm
○ Dry weight	Approx. 910 kg (2,006 lb)
○ Dimension (LxWxH)	1,383 x 870 x 1,207 mm (54.4 x 34.3 x 47.5 in.)
○ Rotation	Counter clockwise viewed from Flywheel
○ Fly wheel housing	SAE NO.1
○ Fly wheel	Clutch NO.14

## ◎ MECHANISM

○ Type	Over head valve
○ Number of valve	Intake 1, exhaust 1 per cylinder
○ Valve lashes at cold	Intake 0.30mm (0.0118 in.) Exhaust 0.30mm (0.0118 in.)

## ◎ VALVE TIMING

	Opening	Close
○ Intake valve	18 deg. BTDC	34 deg. ABDC
○ Exhaust valve	46 deg. BBDC	14 deg. ATDC

## ◎ FUEL CONSUMPTION

○ Prime Power (lit/hr)	1,500 rpm	1,800 rpm
25%	16.9	20.6
50%	31.3	37
75%	47	56
100%	63.1	73.8
○ Standby Power (lit/h)	1,500 rpm	1,800 rpm
25%	18.3	22.2
50%	34.9	41.4
75%	51.6	61.5
100%	77.6	89.5

## ◎ FUEL SYSTEM

○ Injection pump	Zexel in-line “P” type
○ Governor	Electric type
○ Feed pump	Mechanical type
○ Injection nozzle	Multi hole type
○ Opening pressure	220 kg/cm <sup>2</sup> (3,129 psi)
○ Fuel filter	Full flow, cartridge type
○ Used fuel	Diesel fuel oil

## ◎ LUBRICATION SYSTEM

○ Lub. Method	Fully forced pressure feed type
○ Oil pump	Gear type driven by crankshaft
○ Oil filter	Full flow, cartridge type
○ Oil pan capacity	High level 23 liters ( 6.1 gal.) Low level 20 liters ( 5.3 gal.)
○ Angularity limit	Front down 25 deg. Front up 25 deg. Side to side 15 deg.
○ Lub. Oil	Refer to Operation Manual

## ◎ COOLING SYSTEM

- Cooling method Fresh water forced circulation
- Water capacity 19 liters ( 5.02 gal.)  
(engine only)
- Pressure system Max. 0.9 kg/cm<sup>2</sup> ( 12.8 psi)
- Water pump Centrifugal type driven by gear
- Water pump Capacity 320 liters ( 84.5 gal.)/min  
at 1,800 rpm (engine)
- Thermostat Wax – pellet type  
Opening temp. 71°C  
Full open temp. 85°C
- Cooling fan Blower type, plastic  
755 mm diameter, 7 blade

## ◎ ELECTRICAL SYSTEM



- Charging generator 24V x 45A alternator
- Voltage regulator Built-in type IC regulator
- Starting motor 24V x 6.0kW
- Battery Voltage 24V
- Battery Capacity 150 AH (recommended)
- Starting aid (Option) Block heater

## ◎ ENGINEERING DATA

- |                                 |                                                                |
|---------------------------------|----------------------------------------------------------------|
| ○ Water flow                    | 265 liters/min @1,500 rpm                                      |
| ○ Heat rejection to coolant     | 27.6 kcal/sec @1,500 rpm                                       |
| ○ Heat rejection to CAC         | 8.4 kcal/sec @1,500 rpm                                        |
| ○ Air flow                      | 20.1 m <sup>3</sup> /min @1,500 rpm                            |
| ○ Exhaust gas flow              | 47.4 m <sup>3</sup> /min @1,500 rpm                            |
| ○ Exhaust gas temp.             | 590 °C @1,500 rpm                                              |
| ○ Water flow                    | 320 liters/min @1,800 rpm                                      |
| ○ Heat rejection to coolant     | 32.2 kcal/sec @1,800 rpm                                       |
| ○ Heat rejection to CAC         | 14.9 kcal/sec @1,800 rpm                                       |
| ○ Air flow                      | 28.2 m <sup>3</sup> /min @1,800 rpm                            |
| ○ Exhaust gas flow              | 64.2 m <sup>3</sup> /min @1,800 rpm                            |
| ○ Exhaust gas temp.             | 580 °C @1,800 rpm                                              |
| ○ Max. permissible restrictions |                                                                |
| - Intake system                 | 220 mmH <sub>2</sub> O initial<br>635 mmH <sub>2</sub> O final |
| - Exhaust system                | 600 mmH <sub>2</sub> O max.                                    |

## ◆ CONVERSION TABLE

in. = mm x 0.0394	lb/ft = N.m x 0.737
PS = kW x 1.3596	U.S. gal = lit. x 0.264
psi = kg/cm <sup>2</sup> x 14.2233	kW = 0.2388 kcal/s
in <sup>3</sup> = lit. x 61.02	lb/PS.h = g/kW.h x 0.00162
hp = PS x 0.98635	cfm = m <sup>3</sup> /min x 35.336
lb = kg x 2.20462	

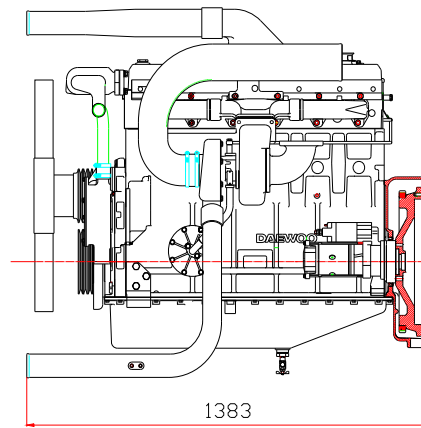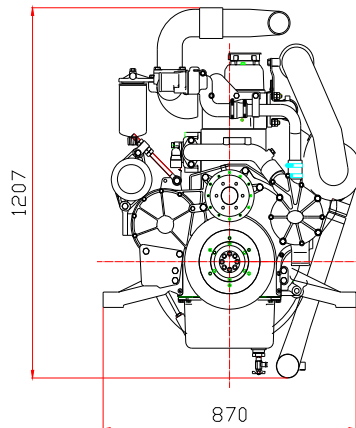

### Head office

7-11, Hwasu-Dong, Dong-Gu, Incheon, Korea  
TEL : 82-32-760-1437, 1964 FAX : 82-32-760-1964

### Seoul Office

Doosan Infracore Co. Ltd.,  
22nd Floor, Doosan Tower, 18-12, Euljiro 6-ga, Jung-gu,  
Seoul, Korea.

TEL : 82-2-3398-8521~8535 FAX : 82-2-3398-8509

Web site : [www.doosaninfracore.com](http://www.doosaninfracore.com)

※ Specifications are subject to change without prior notice